

INSTALLATION INSTRUCTION

LED WATERPROOF LAMP



2 YEARS
WARRANTY

TECHNICAL DATA


Model	Power	Lumens	BeamAngle	CRI	PF	IP Rating (Fitting)	IP Rating (Tube)	Dimension	Input Power	Clip Numbers
VT-6028	1x10W	850	120°	>80	>0.5	IP65	IP20	666x68x58mm	AC:200-240V, 50/60Hz	6
VT-6029	2x10W	1700	120°	>80	>0.5	IP65	IP20	666x96x58mm	AC:200-240V, 50/60Hz	6
VT-12028	1x18W	1700	120°	>80	>0.5	IP65	IP20	1276x68x58mm	AC:200-240V, 50/60Hz	10
VT-12023	2x18W	3400	120°	>80	>0.5	IP65	IP20	1276x96x58mm	AC:200-240V, 50/60Hz	10
VT-15028	1x22W	2000	120°	>80	>0.5	IP65	IP20	1576x68x58mm	AC:200-240V, 50/60Hz	12
VT-15022	2x22W	4000	120°	>80	>0.5	IP65	IP20	1576x96x58mm	AC:200-240V, 50/60Hz	12

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING!

- Please make sure to turn off the power before starting the installation.
- . If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Installation must be performed by a qualified electrician.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.


PRODUCT FEATURES:

- Higher light transmittance diffuser made of transparent PC.
- Housing body type: Opaque ABS + PC.
- Silicone gel gasket and ABS clips for good mechanical performance or stainless steel clips ensuring IP65 of the lighting fixture.
- Key electrical components all installed on the movable reflector, easy, maintenance.
- Use rubber cable 3x1mm or 3x1.5mm for outdoor mounting.
- PG11 waterproof cable gland available wiring input on one side of the housing.

LAMP REPLACEMENT INSTRUCTION


- Unlock the clips and open the diffuser to replace or install the tubes.

MOUNTING BRACKETS INSTALLATION:

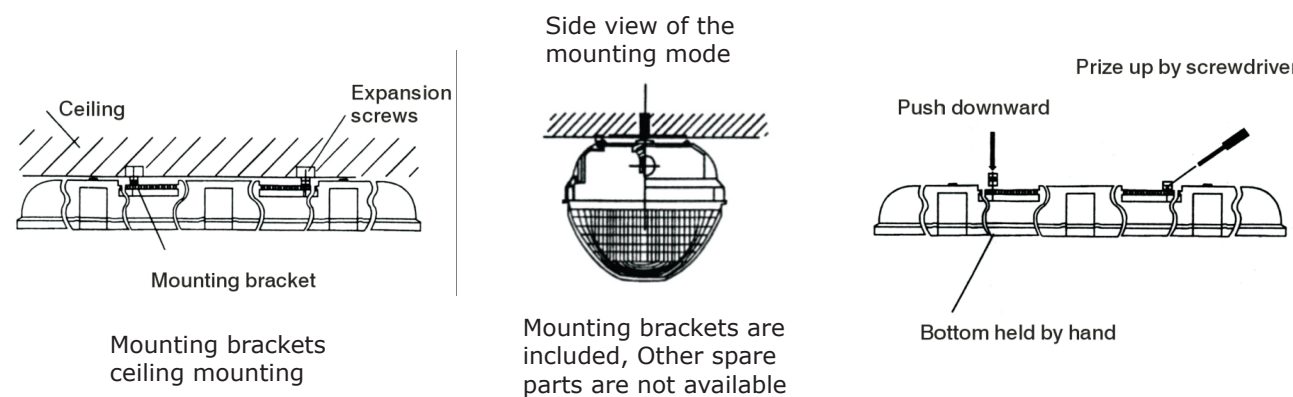


INSTALLATION DIAGRAM:


STEP 1: Slip open the clips

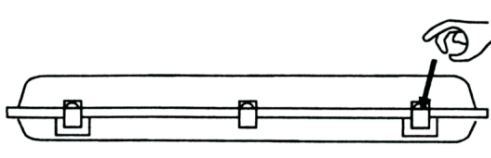

STEP 2: Open the diffuser

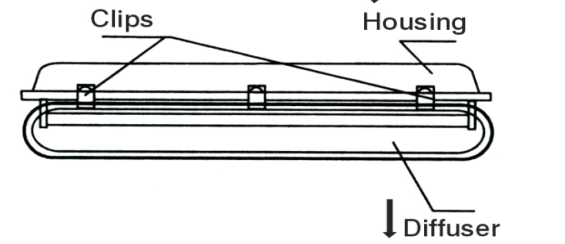

STEP 3: Install or replace the tubes.

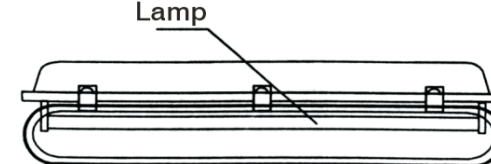

STEP 4: Close the diffuser & ensure the fitting is locked properly using the clips.

